




SNR Bearing Argentina

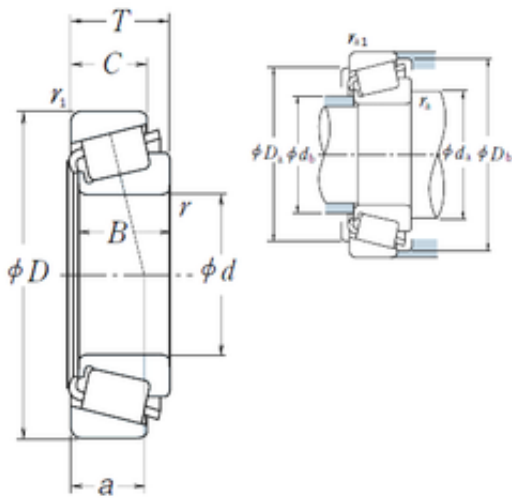

15,875 mm x 49,225 mm x 21,539 mm NSK
09062/09195 tapered roller bearings

Bearing No. 09062/09195

09062/09195 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|-------------------------|
| Size | 15.875x49.225x19.845 mm |
| Bore Diameter | 15,875 mm |
| Outer Diameter | 49,225 mm |
| Width | 19,845 mm |
| d | 15,875 mm |
| D | 49,225 mm |
| T | 19,845 mm |
| B | 21,539 mm |
| C | 14,288 mm |
| ra1 max. | 1,3 mm |
| a | 10,7 mm |
| r min. | 0,8 mm |
| r1 min. | 1,3 mm |
| Da | 42 mm |
| db | 21,5 mm |
| ra max. | 0,8 mm |
| da | 22 mm |
| Db | 44,5 mm |
| Weight | 0,204 Kg |
| Basic dynamic load rating (C) | 37,5 kN |
| Basic static load rating (C0) | 37 kN |
| (Grease) Lubrication Speed | 8500 r/min |
| (Oil) Lubrication Speed | 11000 r/min |
| Calculation factor (e) | 0,27 |
| Calculation factor (Y0) | 1,2 |



SNR Bearing Argentina

| | |
|------------|---------------|
| LangID | 1 |
| ALP23 | 0 |
| outer r | 1.3 |
| ALP22 | 5 |
| D_ | 49.225 |
| ALP21 | 20 |
| SHOG_yobi | 09062R/09195R |
| RAr | 123.714 |
| inner r | 0.8 |
| GRS rpm | 8500 |
| D_b | 44.5 |
| D_a | 42 |
| DE_ | 40.82 |
| SLR | 13.5 |
| Prod_Type3 | TRBSR_ID_A |
| BETA_ | 1 |
| ALPHA_ | 10.042 |
| SDM_ | 33.533 |
| DA1 | 7.771 |
| DA2 | 6.927 |
| hidYobi | 09062/09195 |
| Y1 | 2.3 |
| B_ | 21.539 |
| Oil rpm | 11000 |
| hidTable | ecat_NSTPRI |
| Y0 | 1.2 |
| inner ra | 0.8 |
| outer rb | 1.3 |
| C0 | 37 |
| CUP | 0.065 |
| e | 0.27 |
| DA_ | 7.351 |
| | |



SNR Bearing Argentina

| | |
|-------|-------------|
| BET21 | 3 |
| BET22 | 36 |
| BET23 | 0 |
| Z_ | 12 |
| C_ | 14.288 |
| yobi | 09062/09195 |
| KBRG | 3161 |
| CONE | 0.139 |
| DI_ | 26.237 |